

FIRE PROTECTION & WATERWORKS HANGERS


B 24 Top Beam Clamp - Wide Mouth

Material: Ductile iron casting with a hardened steel set screw

Application: Designed for attaching a hanger rod to the top or bottom flange of a bar joist or other structural shapes where the thickness of the flange does not exceed 1 +"

Ordering: Specify figure number, and rod size.

Approvals: Underwriters' Laboratory Listed and Factory Mutual Approved. Conforms with Manufacturers Standardization Society ANSI/MSS-5P-58 (Type 19 & 23), Install in accordance with ANSI/MSS-5P-69. Exceeds requirements of NFPA-13..

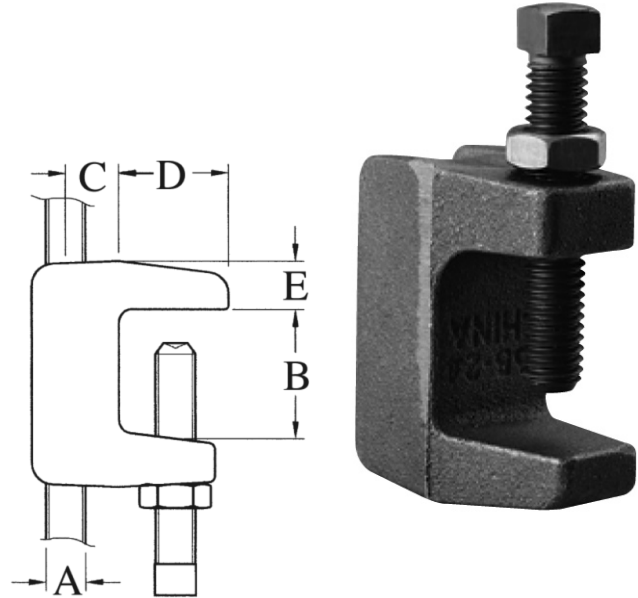

B24



B 24 TOP BEAM CLAMP - WIDE MOUTH

Rod Size		"B"		"C"		"D"		"E"		Max Rec Loads	Box Qty
	mm		mm		mm		mm		mm		
3/8	10	1-1/8	28.6	.49	12.5	1	25.4	7/16	11.1	950	60
1/2	12	1-1/8	28.6	.49	12.5	1	25.4	7/16	11.1	950	55

